AD Enclosure - M03

Search and Secure Procedure

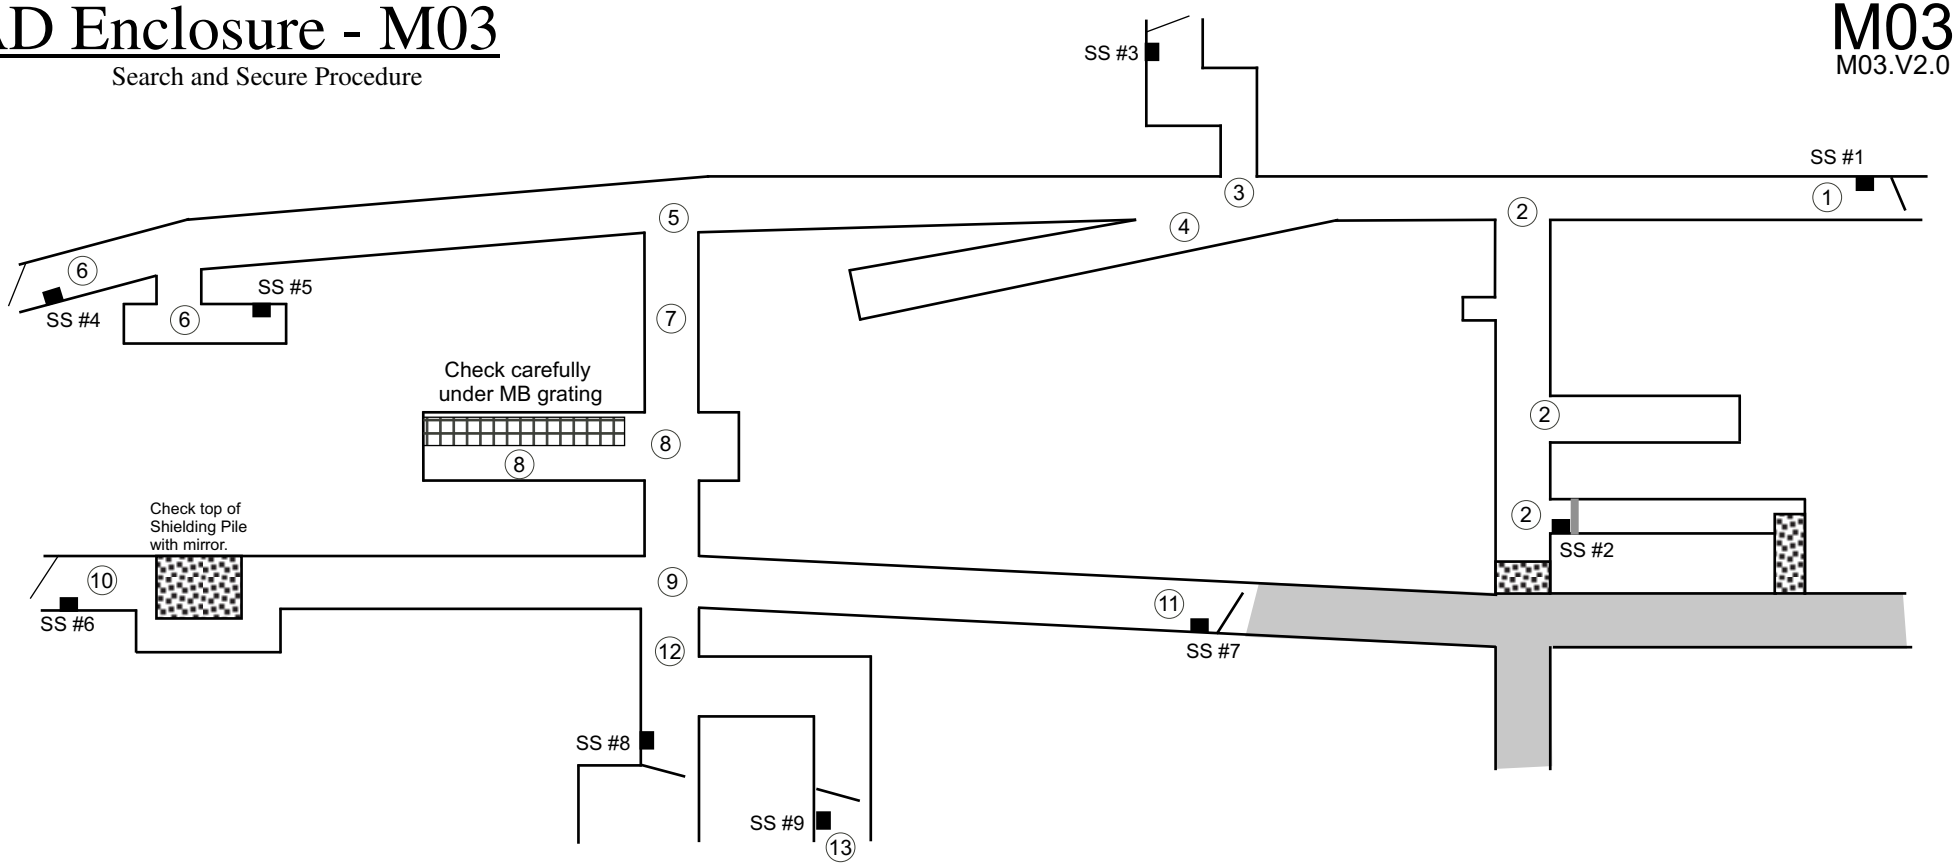

1) "**A**" and "**B**" reset Interlock Box #1.
2) "**A**" holds while "**B**" checks the tunnels and resets Interlock Box #2.
3) "**A**" holds while "**B**" resets Interlock Box #3.
4) "**A**" holds while "**B**" checks the MTest spur area.
5) "**A**" holds.
6) "**B**" sweeps the tunnel to reset Interlock Box #4 then Box #5.
7) "**B**" joins "**A**" and they sweep the tunnel.
8) "**A**" holds while "**B**" checks the MB grating area, the door is locked and no one is in the pit.
9) "**A**" holds.
10) "**B**" sweeps the tunnel upstream to reset Interlock Box #6.
11) While "**A**" holds, "**B**" sweeps the tunnel downstream to reset Interlock Box #7.
12) "**B**" joins "**A** and they reset Interlock Box #8.
13) "**A**" and "**B**" exit and reset Interlock Box #9.

Reviewed AD/RSO	Date
Michael A Gerardi	4-1-09
Approved AD/OPS Dept. Head	Date
	4-2-09

spb 25 Feb 2008
Version 2.0

CONTROLLED DOCUMENT
Users are responsible for ensuring they work to the latest approved revision. Printed or electronically transmitted copies are uncontrolled.